



Communications without Frontiers



TM840-GW

DMR/Analog/PTToC

TM840 series gateway supports voice interconnection between DMR and PTToC radios. It can be widely used in different zones, formats and frequency bands with rich compatibility and high convenience.



Highlights

Interconnection Between Private Network and Public Network

TM840-GW gateway supports voice interconnection between DMR and PTToc Radio.

Multiple Network Access

2G/3G/4G/Wi-Fi network ensures wide coverage and stable connectivity.

Multiple Private Communications Formats

TM840-GW gateway supports voice interconnection between analog and DMR Tier II.

Interconnection Between VHF and UHF

TM840-GW gateway supports voice interconnection between different frequencies in VHF(136-174MHz) and UHF(400-470MHz).

High Transmitting Power

10 Watt power ratings allows wider coverage.

Specification

General Specifications


| | |
|-----------------------|--------------|
| Dimensions | 176x59x183mm |
| Weight | ≤1380g |
| Operating Temperature | -20°C + 55°C |
| Storage Temperature | -40°C + 85°C |

PTToC Specifications

| | |
|--------------------------------------|---|
| Communications Mode & Frequency Band | America GSM:Band2/8 WCDMA:Band1/2/4/5/8 FDD-LTE:Band2/4/5/7/12/13/17/25/26 |
| RAM+ROM | 512MB+4GB |
| Wi-Fi | 2.4GHz |

DMR/Analog Specifications

| | |
|---------------------|----------------------|
| Frequency Available | 136-174MHz/400-470Hz |
| Format | Analog/DMR |
| Operation Mode | Direct Mode/Repeater |
| Transmitting Power | 1-10W |
| Sensitivity | -120dBm |

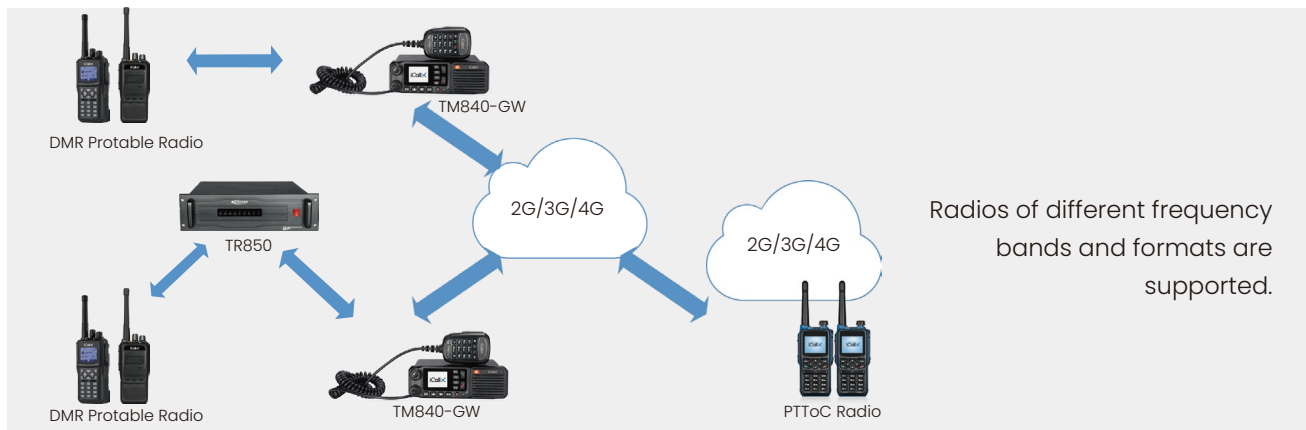

Accessories



iCallX

Address

6073 NW 167 St., Unit C 27
Miami, FL 33015
USA

Contact

Email: info@icallx.com
Phone: + 1 786 359 4933

